




# ISO Bearing CO.,LTD.

## 160 mm x 290 mm x 80 mm FAG 22232-E1-K + AH3132A Rodamientos De Rodillos Esf é ricos

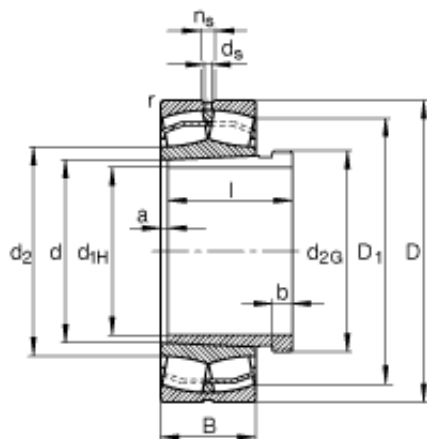

Bearing No. 22232-E1-K + AH3132A

22232-E1-K + AH3132A Bearing 2D drawings and 3D CAD models

Size	150x290x80 mm
Bore Diameter	150 mm
Outer Diameter	290 mm
Width	80 mm
$d_{1H}$	150 mm
D	290 mm
B	80 mm
a	5 mm
b	16 mm
$D_1$	258,2 mm
$D_{a \max}$	276 mm
d	160 mm
$d_2$	190,9 mm
$d_{2G}$	M170X3
$d_{a \min}$	174 mm
$d_s$	8 mm
l	103 mm
$n_s$	15 mm
$r_{a \max}$	2,5 mm
$r_{\min}$	3 mm
	AH3132A / Designation, withdrawal sleeve
m	22,4 kg / Weight
$m_1$	2,9 kg / Weight, withdrawal



## ISO Bearing CO.,LTD.

	sleeve
$C_r$	1150000 N
$e$	0,26
$Y_1$	2,64
$Y_2$	3,93
$C_{or}$	1400000 N / Static load rating (radial)
$Y_0$	2,58
$n_G$	2650 1/min / Limiting speed
$n_B$	1960 1/min / Reference speed